




Curva 45° PP

Estremità per saldatura di testa
Codice: DHBM

PP bend 45°

Ends for butt fusion welding
Code: DHBM

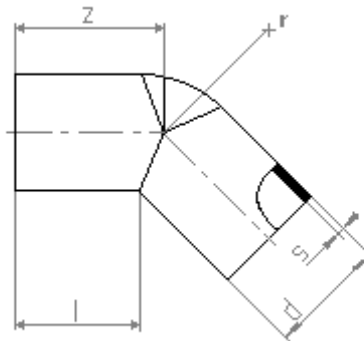

d	r	Z	l	SDR 17,6 - S 8,3 - PN 6		SDR 11 - S 5 - PN 10	
				S	Peso Weight (gr)	S	Peso Weight (gr)
20	20	8	45	-	-	1,9	80
25	25	10	49	-	-	2,3	82
32	32	13	57	-	-	2,9	84
40	40	16	65	2,3	-	3,7	86
50	50	21	77	2,9	-	4,6	88
63	63	26	90	3,6	70	5,8	90
75	75	31	103	4,3	95	6,8	150
90	90	37	112	5,1	180	8,2	250
110	110	45	120	6,3	290	10,0	400
125	125	51	136	7,1	370	11,4	590
140	140	57	147	8,0	570	12,7	810
160	160	66	156	9,1	740	14,6	1150
180	180	74	176	10,2	960	16,4	1610
200	200	82	190	11,4	1290	18,2	2090
225	225	93	208	12,8	1570	20,5	2030
250	265	110	25	14,2	1830	22,7	2930
280	265	110	25	15,9	2800	25,4	3300
315	300	125	40	17,9	4040	28,6	5030
355	300	125	40	20,1	5210	32,3	6110
400	300	125	49	22,7	7000	36,3	8000

- Attacchi in accordo alle seguenti normative:
DIN 16962, accoppiabili con tubi secondo le norme EN ISO 15494, DIN 8077/8078, UNI 8318.

- Coupling comply with the following standards:
DIN 16962, coupling to pipes complying with EN ISO 15494, DIN 8077/8078, UNI 8318.