




Manicotto PP

Estremità femmina filettate
Codice: DMFM

PP double socket
Parallel threaded socket
Code: DMFM

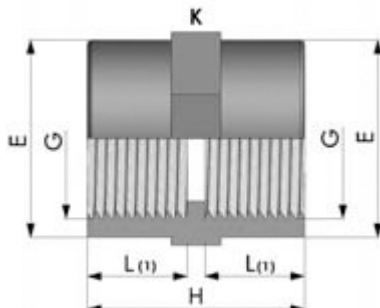

| G (inch) | L(1) (mm) | H (mm) | E (mm) | K (mm) |
|---------------------------|----------------------------|-------------------------|-------------------------|-------------------------|
| 3/8" | 15,0 | 33,0 | 34,5 | 25,0 |
| 1/2" | 16,0 | 35,5 | 30,0 | 30,0 |
| 3/4" | 19,0 | 42,0 | 35,5 | 36,0 |
| 1" | 22,0 | 46,5 | 43,0 | 43,0 |
| 1 1/4" | 24,0 | 53,0 | 57,5 | 58,0 |
| 1 1/2" | 26,5 | 58,5 | 65,0 | 70,0 |
| 2" | 30,0 | 67,0 | 80,5 | 83,0 |

- Colore: Beige RAL 7032
- Giunzione: Filettatura cilindrica secondo UNI ISO 228/1
- Dimensioni: Ø 1/4" ÷ Ø 2"
- Temperature di esercizio: - 10°C ÷ +100 °C
- Pressione di esercizio max: 10 bar

- *Color: Beige RAL 7032*
- *Joint: Gas parallel threading standards UNI ISO 228/1*
- *Dimensions: Ø 1/4" ÷ Ø 2"*
- *Working temperature: - 10°C ÷ +100 °C*
- *Max working pressure: 10 bar*