




Riduzione PVDF

Estremità maschio per saldatura a tasca
(1° d di riferimento), d_1 ridotto femmina
Codice: DRIF

PVDF reducer
*For socket fusion d male,
 d_1 reduced female*
Code: DRIF

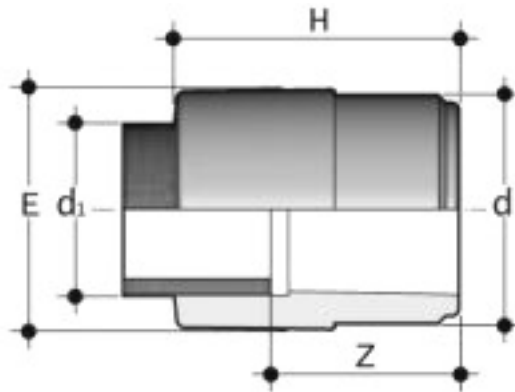

d x d₁ (mm x mm)	E (mm)	H (mm)	Z (mm)	PN (bar)	Peso Weight (gr)
20 x 16	20,0	35,0	22,0	16	11
25 x 20	26,0	40,0	25,5	16	15
32 x 25	31,5	46,0	30,0	16	28
40 x 25	32,0	51,0	35,0	16	40
40 x 32	39,5	53,5	35,5	16	47
50 x 32	39,0	59,0	41,0	16	55
50 x 40	47,0	63,0	42,5	16	70
63 x 32	40,0	67,0	49,0	16	100
63 x 50	59,5	76,0	52,5	16	130
75 x 63	75,0	88,5	61,0	16	220
90 x 63	73,0	97,0	69,5	16	280
90 x 75	86,5	103,5	72,5	16	335
110 x 90	102,5	120,5	85,0	16	520

- Attacchi in accordo alle seguenti normative:
ISO/DIS 10931

- Coupling comply with the following standards:
ISO/DIS 10931