




Riduzione PE100

Estremità maschio per saldatura nel bicchiere (1° d di riferimento),
d₁ ridotto femmina

PE100 reducer
For socket fusion d male,
d₁ reduced female

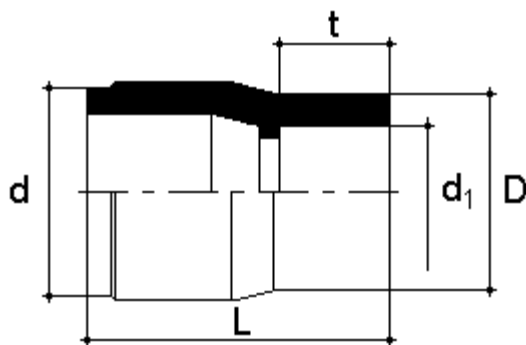

d x d ₁ (mm x mm)	L (mm)	D (mm)	t (mm)	Peso Weight (kg)	PN (bar)
25 x 20	39,0 ± 2,5	30,0 ± 1,0	16,0 ± 1,0	0,01	16
32 x 20	45,5 ± 2,5	30,0 ± 1,0	16,0 ± 1,0	0,02	16
32 x 25	45,0 ± 2,5	35,0 ± 1,0	18,0 ± 1,0	0,02	16
40 x 20	50,0 ± 2,5	29,5 ± 1,0	16,0 ± 1,0	0,02	16
40 x 25	50,0 ± 2,5	34,5 ± 1,0	18,0 ± 1,0	0,02	16
40 x 32	50,0 ± 2,5	42,8 ± 1,0	20,0 ± 1,0	0,03	16
50 x 20	55,0 ± 2,5	29,4 ± 1,0	16,0 ± 1,0	0,03	16
50 x 25	55,0 ± 2,5	34,7 ± 1,0	18,0 ± 1,0	0,03	16
50 x 32	55,0 ± 2,5	43,7 ± 1,0	18,6 ± 1,0	0,04	16
50 x 40	55,0 ± 2,5	52,8 ± 1,0	25,5 ± 1,0	0,05	16
63 x 25	65,0 ± 2,5	34,8 ± 1,0	18,0 ± 1,0	0,06	16
63 x 32	65,0 ± 2,5	42,9 ± 1,0	20,5 ± 1,0	0,06	16
63 x 40	65,0 ± 2,5	52,8 ± 1,0	21,5 ± 1,0	0,07	16
63 x 50	65,0 ± 2,5	64,8 ± 1,0	25,0 ± 1,0	0,07	16
75 x 63	64,0 ± 2,5	81,5 ± 1,0	29,0 ± 1,0	0,11	16
90 x 63	87,8 ± 2,5	81,8 ± 1,0	29,0 ± 1,0	0,18	16
90 x 75	86,6 ± 2,5	93,0 ± 1,0	33,0 ± 1,0	0,19	16
110 x 63	90,0 ± 2,5	81,2 ± 1,0	29,0 ± 1,0	0,25	16
110 x 90	88,7 ± 2,5	113,8 ± 1,0	37,0 ± 1,0	0,30	16

Materiale: PE 100
Colore: nero
Idoneo per linee chimiche, acqua e gas

*Material: PE 100
Colour: black
Suitable for chemical, water and gas piping system*