




DERIVAZIONE Y 45°

- Raccordo per linee ventilazione/aspirazione
- Estremità femmina

Y DERIVATION 45°

- Fitting for ventilation/aspiration lines
- Female socket connections

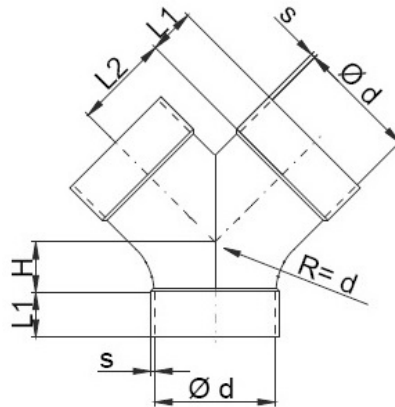

Ø d (mm)	L1 (mm)	L2 (mm)	H (mm)	s (mm)		Peso Weight (Kg)	
				PVC	PP	PVC	PP
50	35	50	30	3,0	3,0	0,14	0,10
63	35	55	35	3,0	3,0	0,17	0,12
75	30	65	45	3,0	3,0	0,24	0,17
90	30	70	50	3,0	3,0	0,30	0,22
110	40	95	60	3,0	3,0	0,50	0,35
125	40	100	65	3,0	3,0	0,55	0,40
140	40	120	75	3,0	3,0	0,70	0,50
160	40	140	80	3,0	3,0	0,90	0,65
180	50	150	90	3,0	3,0	1,30	0,95
200	50	175	95	3,0	3,0	1,50	1,10
225	50	185	105	3,0	4,0	1,70	1,40
250	50	215	115	3,0	4,0	1,80	1,50
280	50	245	130	3,0	4,0	2,50	2,40
315	50	275	145	3,0	5,0	2,70	3,00
355	50	305	160	4,0	5,0	4,40	4,00
400	60	355	180	4,0	6,0	5,90	6,30
450	60	415	200	4,0	6,0	8,90	9,50
500	60	460	220	4,0	6,0	9,80	10,50

Diametri maggiori Ø 500 a richiesta
 Diameters larger than Ø 500 on demand