




DERIVAZIONE Y 90°

- Raccordo per linee ventilazione/aspirazione
- Estremità femmina

Y DERIVATION 90°

- Fitting for ventilation/aspiration lines
- Female socket connections

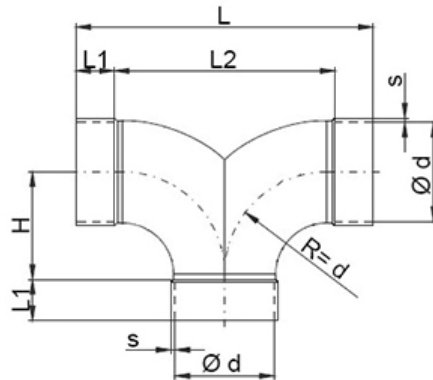

Ø d (mm)	L (mm)	L1 (mm)	L2 (mm)	H (mm)	s (mm)		Peso Weight (Kg)	
					PVC	PP	PVC	PP
50	190	35	120	60	3,0	3,0	0,20	0,14
63	210	35	140	70	3,0	3,0	0,25	0,15
75	230	30	170	85	3,0	3,0	0,30	0,20
90	260	30	200	100	3,0	3,0	0,45	0,30
110	320	40	240	120	3,0	3,0	0,60	0,40
125	350	40	270	135	3,0	3,0	0,80	0,60
140	380	40	300	150	3,0	3,0	1,00	0,70
160	420	40	340	170	3,0	3,0	1,40	0,80
180	480	50	380	190	3,0	3,0	1,90	1,00
200	520	50	420	210	3,0	3,0	2,20	1,40
225	570	50	470	235	3,0	3,5	2,50	1,80
250	620	50	520	260	3,0	3,5	3,00	2,30
280	680	50	580	290	3,0	4,0	3,70	4,20
315	750	50	650	325	3,0	5,0	4,90	4,80
355	830	50	730	365	4,0	5,0	6,30	6,20
400	940	60	820	410	4,0	6,0	8,00	7,70
450	1040	60	920	460	4,0	6,0	14,00	12,00
500	1140	60	1020	510	4,0	6,0	16,00	15,00

Diametri maggiori Ø 500 a richiesta
 Diameters larger than Ø 500 on demand