




## Collare d'appoggio striato PVC

- Codice prodotto: DQPV
- Estremità femmina per incollaggio
- Attacchi in accordo con le seguenti norme:  
ISO 727, DIN 8063, NF T54-028, KIWA 54, UNI-EN 1452  
accoppiabili con tubi secondo ISO 161/1, UNI-EN 1452, DIN 8062, NF T54-016, KIWA 49



## PVC stub serrated

- Product code: DQPV
- Female spigot for solvent welding
- Connections conforming with the following standards:  
ISO 727, DIN 8063, NF T54-028, KIWA 54, UNI-EN 1452  
coupling to the pipes complying with ISO 161/1, UNI-EN 1452, DIN 8062, NF T54-016, KIWA 49

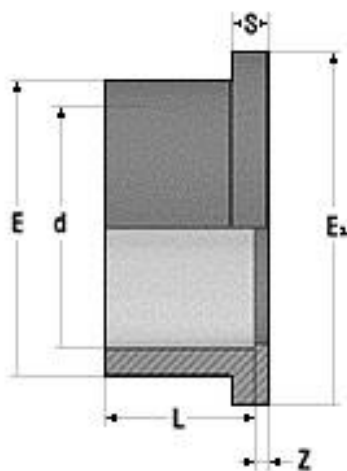

d	DN	L	Z	S	E	E <sub>1</sub>	PN	Peso Weight (gr)
20	15	16	3	6	27	34	16	10
25	20	19	3	7	33	41	16	18
32	25	22	3	7	41	50	16	26
40	32	26	3	8	50	61	16	41
50	40	31	3	8	61	73	16	62
63	50	38	3	9	76	90	16	111
75	65	44	3	10	90	106	16	157
90	80	51	5	11	108	125	16	260
110	100	61	5	12	131	150	16	420
125	110	69	5	12	147	167	16	540
140	125	76	5	13	163	187	16	740
160	150	86	6	16	185	213	16	1012
200	200	106	7	18	231	253	16	1857
225	200	119	8	19	247	274	16	1734

### Grandi diametri Large diameters

d	DN	L	Z	S	E	E <sub>1</sub>	PN	Peso Weight (gr)
250	225	131	10	20	273	307	10	2300
280	250	142	10	23	308	329	10	3100
315	300	161	11	27	346	379	10	4500