




## Collare d'appoggio striato PVC

- Codice prodotto: DQPV
- Estremità femmina per incollaggio
- Attacchi in accordo con le seguenti norme:  
ISO 727, DIN 8063, NF T54-028, KIWA 54, UNI-EN 1452  
accoppiabili con tubi secondo ISO 161/1, UNI-EN 1452, DIN  
8062, NF T54-016, KIWA 49

## PVC stub serrated

- Product code: DQPV
- Female spigot for solvent welding
- Coupling comply with the following standards:  
ISO 727, DIN 8063, NF T54-028, KIWA 54, UNI-EN 1452  
coupling to the pipes complying with ISO 161/1, UNI-EN  
1452, DIN 8062, NF T54-016, KIWA 49

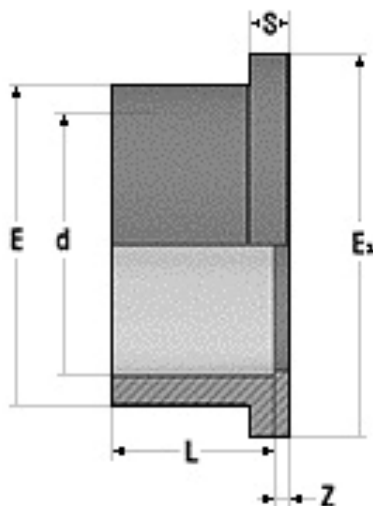

d	DN	L	Z	S	E	E <sub>1</sub>	PN	Peso Weight (gr)
20	15	16	3	6	27	34	16	10
25	20	19	3	7	33	41	16	18
32	25	22	3	7	41	50	16	26
40	32	26	3	8	50	61	16	41
50	40	31	3	8	61	73	16	62
63	50	38	3	9	76	90	16	111
75	65	44	3	10	90	106	16	157
90	80	51	5	11	108	125	16	260
110	100	61	5	12	131	150	16	420
125	110	69	5	12	147	167	16	540
140	125	76	5	13	163	187	16	740
160	150	86	6	16	185	213	16	1012
200	200	106	7	18	231	253	16	1857
225	200	119	8	19	247	274	16	1734

### Grandi diametri Large diameters

250	225	131	10	20	273	307	10	2300
280	250	142	10	23	308	329	10	3100
315	300	161	11	27	346	379	10	4500